


Art	E-nr	Färg	RAL
1321AL	7748051	ALUMINIUM	9006
1321GR	7748052	GRAFIT	7016

## Allmän information

Typ armatur	
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	Polykarbonat med optisk struktur, UV stabiliserat
Typ ljuskälla	LED modul + driver
Ljusstyrning	Bakkantsdimmer
Netto / Bruttovikt armatur	4,95kg / 5,95kg
Förpackning mått [cm]	92,5x16x16
LED	Philips SLM C 830 1203 L09 1619 G7
Drivdon	Philips Xitanium 10W 0.25A 40V TE SC 230V
Led modul effekt	8,5W
Armatur effekt	9,3W
Lumen modul	1294lm
Lumen ut	301lm
Led modul effekt	152,2lm/W
Armaturens effekt	32,4lm/W
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	>50 000h
Energieffektivitetsindex (EEI)	<b>A++</b>
Effektfaktor	PF>0,90
Ta nominel:	+25°C
Inrush current	0,98A / 38µs
Antal armaturer på automatsäkring	<b>B 10A:</b> 126, <b>B 16A:</b> 200, <b>C 10A:</b> 208, <b>C 16A:</b> 340

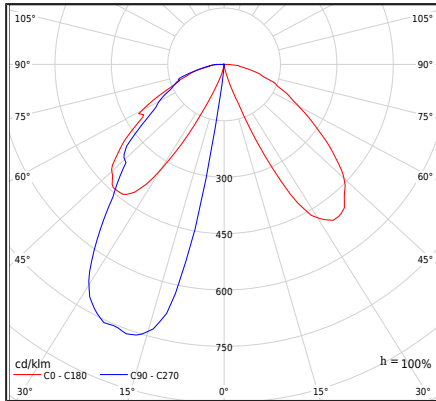

## Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer

