


Art	E-nr	Färg	RAL
1244AL	7747381	ALUMINIUM	9006
1244GR	7747382	GRAFIT	7016

## Allmän information

Typ armatur	
Material	Pulverlackerad aluminium
Diffuser/Avskärmning:	Klart polykarbonat, UV stabiliserat
Typ ljuskälla	LED modul + driver
Ljusstyrning	Bakkantsdimmer
Nettovikt armaturen	6,99kg
Förpackning mått [cm]	22,5x22,5x58,5
LED	1305003G2 CREE XD16 3000K
Drivdon	Philips Xitanium 10W 0,5A 20V TE SC
Led modul effekt	9,6W
Armatur effekt	12,2W
Lumen modul	1101lm
Lumen ut	421lm
Led modul effekt	114,7lm/W
Armaturens effekt	34,5lm/W
Färgtemperatur	3000K
Färgbeständighet (McAdam ellipse)	SDCM3
Färgtolkningsindex (CRI/Ra)	80
Nominell livstid L70/B50 vid 25°C	50 000h
LED-fotobiologiskt hot	RG0 or RG1
Energieffektivitetsindex (EEI)	<b>A+</b>
Effektfaktor	PF 0,98
Ta nominel:	+25°C
Inrush current	3,36A/36µs
Antal armaturer på automatsäkring	<b>B 10A:</b> 126, <b>B 16A:</b> 200, <b>C 10A:</b> 208, <b>C 16A:</b> 340

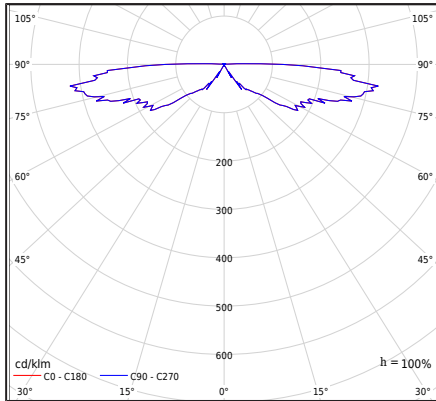

## Filer som kan laddas ned

Photometric LDT files, Photometric IES files, Manualer

